



ESPACE

Sliding gate



Sliding gate



Frame section:
60 x 60 mm



Manual, Motor-ready,
motorised



Height: 1.50 m to 2 m
Opening: 3 m to 6 m



Post section:
100 x 100 mm

6005 Moss green	7016 Anthracite grey	9010 Pure white
--------------------	-------------------------	--------------------

Choice

- Available in the most commonly requested opening widths, heights and colours.
- Manual or motorised operation.

Easy to install

- Delivered with inserts, the installation allows the preparation of the civil engineering works before the installation of the gate.

Use

- Ease of use and manoeuvrability thanks to its simple and sleek design.
- For the motorised version: pre-wiring and tests performed prior to shipping.

Conformity

- In manual or motorised version, ESPACE gates comply with the European standard EN 13241.

Security

- Manual version: lock with European cylinder.
- Motorised version: detection cells, active and inactive sensitive edges, flashing lights and area lighting.
- Detection of light vehicles ensured.

Energy saving

- Low voltage, low consumption LED dash panel area lighting and flashing light, surface mounted.



The ESPACE range also offers cantilever and swing gates (single or double-leaf)

Product highlights



Two LV detection cells (motorised operation)



Surface mounted lighting (motorised operation)



Motorisation for moderate intensity usage



General characteristics

Colours

DIRICKX
ANTI-CORROSION
GUARANTEE

10 YEARS
POLYESTER

DIRICKX
ANTI-CORROSION
GUARANTEE


10 YEARS
PROTECT+

- **Finish:** Zinc-epoxy + polyester*

- **Option:** "Protect +" coating available in all colours for the most corrosive areas *According to the DIRICKX warranty conditions

- Green 6005, White 9010, Grey 7016, Black 9005

Technical features

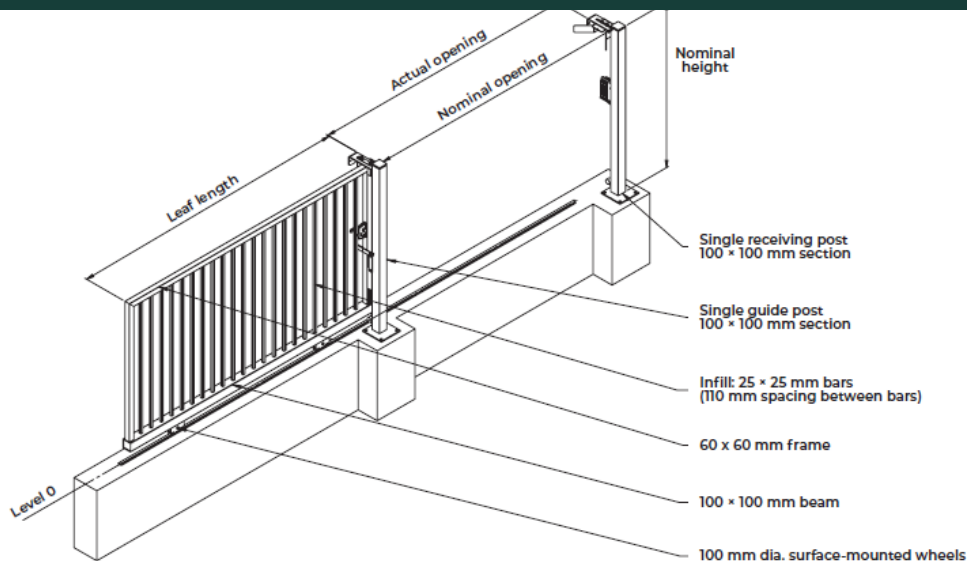

Technical data

Nominal heights	Nominal opening (m)		3.00	4.00	5.00	6.00
	1.50 m 1.80 m 2 m	Actual opening (m)		2.85	3.85	4.85
	Manually operated gate leaf length (m)		3.21	4.29	5.24	6.32
	Motorised gate leaf length (m)		4.12	5.12	6.12	7.12

Drive motor

- Travel speed 10 m/min.
- Up to 70 % use, 27 cycles/hour.
- The travel speed is slowed at the beginning and end of the cycle.
- Backup battery included.
- Integrated radio receiver.
- 1 set of light vehicle detection cells.
- In the event of a security breach, for emergency procedures: key-operation (as an optional extra) and manual stoppage.

Options



- Motorised operation
- Motor-ready version (manual + extended beam, inspection plates, external gear rack)
- Smooth toothed
- Firefighter cylinder 30x30mm
- HGV cells.
- Ground marking.
- Fence fastening bracket.

Note:

- Hinge pins to be provided (not supplied):
- for posts: 8 pins, dia. 16 mm.
 - for motorisation: 4 pins, dia. 12 mm.

Extras

- Commissioning and maintenance contract.
- Instructions and identification numbers are supplied with each gate.
- Civil engineering plan configurator available at www.dirickx.fr



*Details in the "GUARANTEES, STANDARDS & REGULATIONS" tab of the catalogue.