

AXIS®

Residential gates with big folds



1 wing
2 wings



5 Heights:
1,00 / 1,20 / 1,50 / 1,70 / 1,90 m



Mesh: 200 x 55mm



6 passages ways:
1,00 / 1,25 / 1,50 /
3,00 / 3,50 / 4,00m



To be embedded and **ready to install** on a base plate*



Wire diam.:
Vertical = 5 mm
Horizontal = 5 mm

6005 Moss Green	7016 Anthracite grey	7035 Light grey	7030 Stone grey
9005 Black	9010 White		

Lock

- Steel LOCINOX RAL 9005 lock.
- Built-in lock with 100% stainless steel mechanism.
- With its Click-It system, the lock is fitted in a matter of seconds.

Privacy

- Pedestrian gate and gate matched to our Axyle range of big folded panels, AXIS® M.
- Offset hinges minimise the gap between the wing and the posts for maximum privacy.
- Top metal rail supplied to protect spikes if the gate is not filled with a privacy-system

Easy to install


- Ready-to-install embedded or ready-to-install welded base plate. (only for our 1 leaf gate),
- Adjustable in height and depth.
- Adjust the distance between the gate and the post.
- Change the opening direction from right pushing to right pulling or from left pushing to left pulling.

Closing


- The adjustable latch bolt and the combination of the stainless steel hook with the anti-slip striker ensure safe and secure closing.
- Aluminium backplate.
- European cylinder 30-30 mm.
- Toggle stop available for gates with 2 wings model (in accordance with standard EN13241).
- Pair of aluminium lever handles (8mm square).
- Non-return strike: stainless steel mortice lock.
- The stainless steel anchoring system keeps the leaves from moving apart.
- Offset hinges for a 180°C opening.
- Supplied with a LOCINOX floor stop

*ready to install only for our 1 leaf gate

Compatibilities Privacy slats



LIXO® WOOD 22mm and 7mm for small folds
LIXO® TOP for big folds



AXIS® M and C panel



AXOR® et AXIS® slotted post


Additional products



Wall fixations



Privacy slats
LIXO® Wood
7 and 22mm



Privacy slats
LIXO® TOP (grands plis)



AXOR® and
AXIS® post







AXIS® M and C
panel

Technical specifications

Material	sendzimir Z275
Frame	40mm
Posts	Lock posts 60 x 60mm for passages < 1m50 Lock posts 80 x 80mm for passages ≥ 1m50
Finishes and options	Textures, mat, "Protect +"
Infill	AXIS® C
Packaging	Individually or by pallet of 5 pedestrian gates or 1 gate
Types of installation	To be embedded or on a base plate ready to install*
Passageways	1 wing : 1m, 1m25, 1m50 / 2 wings: 3m, 3m50, 4m
Heights	1m, 1m20, 1m50, 1m70, 1m90

*ready to install only for our 1 leaf gate

Specifications

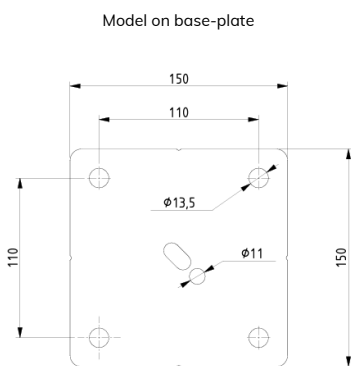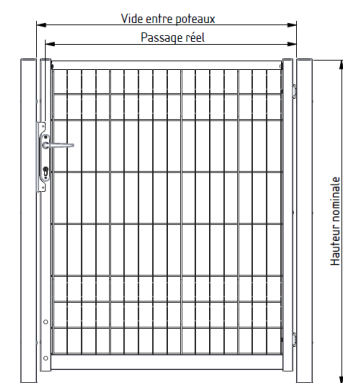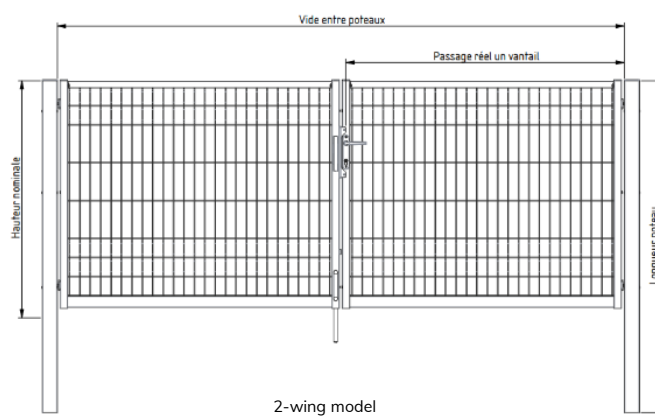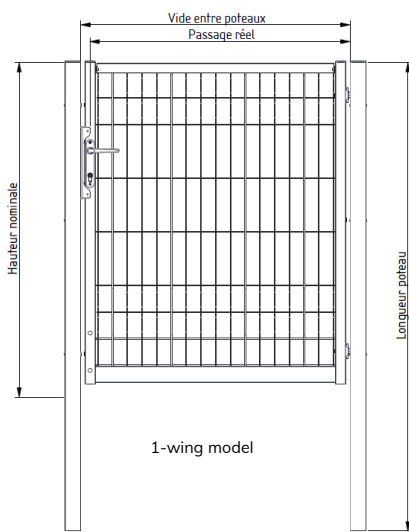

Description	Length for 1 wing (m)			Length for 2 wings (m)		
	1.00	1.25	1.50	3.00	3.50	4.00
Nominal passageway	1.00	1.25	1.50	3.00	3.50	4.00
Real passageway	0.98	1.20	1.48	2.97	3.52	3.97
Space between posts	1.01	1.23	1.51	3.00	3.55	4.00
Wing length	0.97	1.20	1.47	1.47	1.75	1.98
Space beneath wing	0.06	0.06	0.06	0.06	0.06	0.06
Embedding length	0.50	0.50	0.50	0.50	0.50	0.50

Nominal height (m)	Post length (m)		Frame (mm)	Infill (mm)
	On baseplate	To embed		
1.00	1.06	1.56	40 mm	Panel AXIS® C mesh 200 x 55mm Ø wires: horizontal = 5 mm, vertical = 5 mm.
1.20	1.26	1.76		
1.50	1.56	2.06		
1.70	1.76	2.26		
1.90	1.96	2.46		

