



Other Coatings



ELIXIR®

TAO & PUR

Residential gates



1 opening
5 heights



Bar dia.: 20 mm



Ready to install: On base plate / Embedded

6005 Moss green	7016 Anthracite grey	7035 Light grey	7030 Stone grey
	9005 Jet black	9010 Pure white	

Design

- 2 designs: PUR and TAO.

Easy installation

- Ready-to-install side gate.
- Installation on base plate or embedded.
- Locinox hinges adjustable in height and depth.
- Adjustable distance between the leaf and the post.
- Reversible opening direction (right push/pull).

Locking

- Locinox RAL 9005 embedded lock designed to match post caps.
- Embedded lock with 100 % stainless steel mechanism.
- The adjustable latch bolt and combination of the stainless hook with the force-resistant strike plate allows for safe and secure closing.
- With its "Click-it" system, the lock is mounted in just a matter of seconds.
- Aluminium finger plate.
- 30 x 30 mm European cylinder.
- Pair of aluminium lever handles (8 mm square).
- Latch bolt: stainless steel embedded strike plate.
- Offset hinges for a 180° opening.

2 versions




ELIXIR® Pure



ELIXIR® Tao


Compatibility

Railings



ELIXIR® Pure
ELIXIR® Tao

Posts



AXOR® slotted post
AXYLE® H-shaped post

Options



Fence fastening bracket

Zooms



Hinge



Lock Handle

Accessories



Metal clips




Plastic clips

(for AXYLE® post)

Technical description

Material	Sendzimir galvanised steel
Optional finish	Textured, matt, "Protect +" coating
Infill	ELIXIR® PUR and TAO
Type of installation	Ready to install: Embedded or base-plated
Opening	1 m
Heights	1 m, 1.20 m, 1.50 m, 1.70 m, 1.90 m
Plate dimensions	150 x 150 mm

Technical features

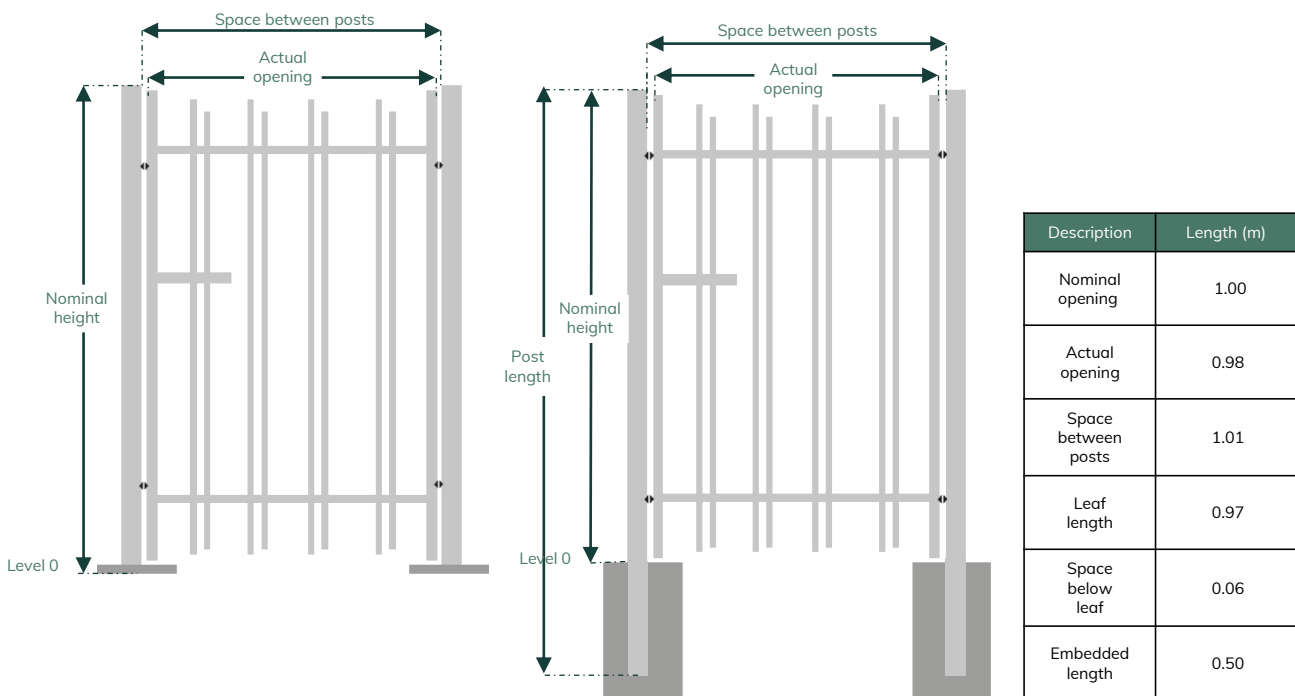

Nominal height (m)	Post length (m)		Post section (mm)	Frame (mm)	Infill (mm)
	Base-plated	Embedded			
1.00	1.06	1.56	60 x 60	40 x 40	ELIXIR® Pure and Tao
1.20	1.26	1.76			
1.50	1.56	2.06			
1.70	1.76	2.26			
1.90	1.96	2.46			

